

740 MW

TAPE & YARN


MANUAL TAKE-UP WINDER

Delivers superior
packaging quality
with step precision
winding and infinite
winding ratios.




NOTABLE FEATURES

- ✓ Back stroke brake unit
- ✓ Cam box swivels through pneumatics
- ✓ Infinite wind ratios
- ✓ Step precision winding
- ✓ Additional vibration dampening
- ✓ Centralized pneumatic stepless tension control (optional)
- ✓ High-quality & consistent yarn packages
- ✓ Plasma-coated bail roller and compensation bow bar available

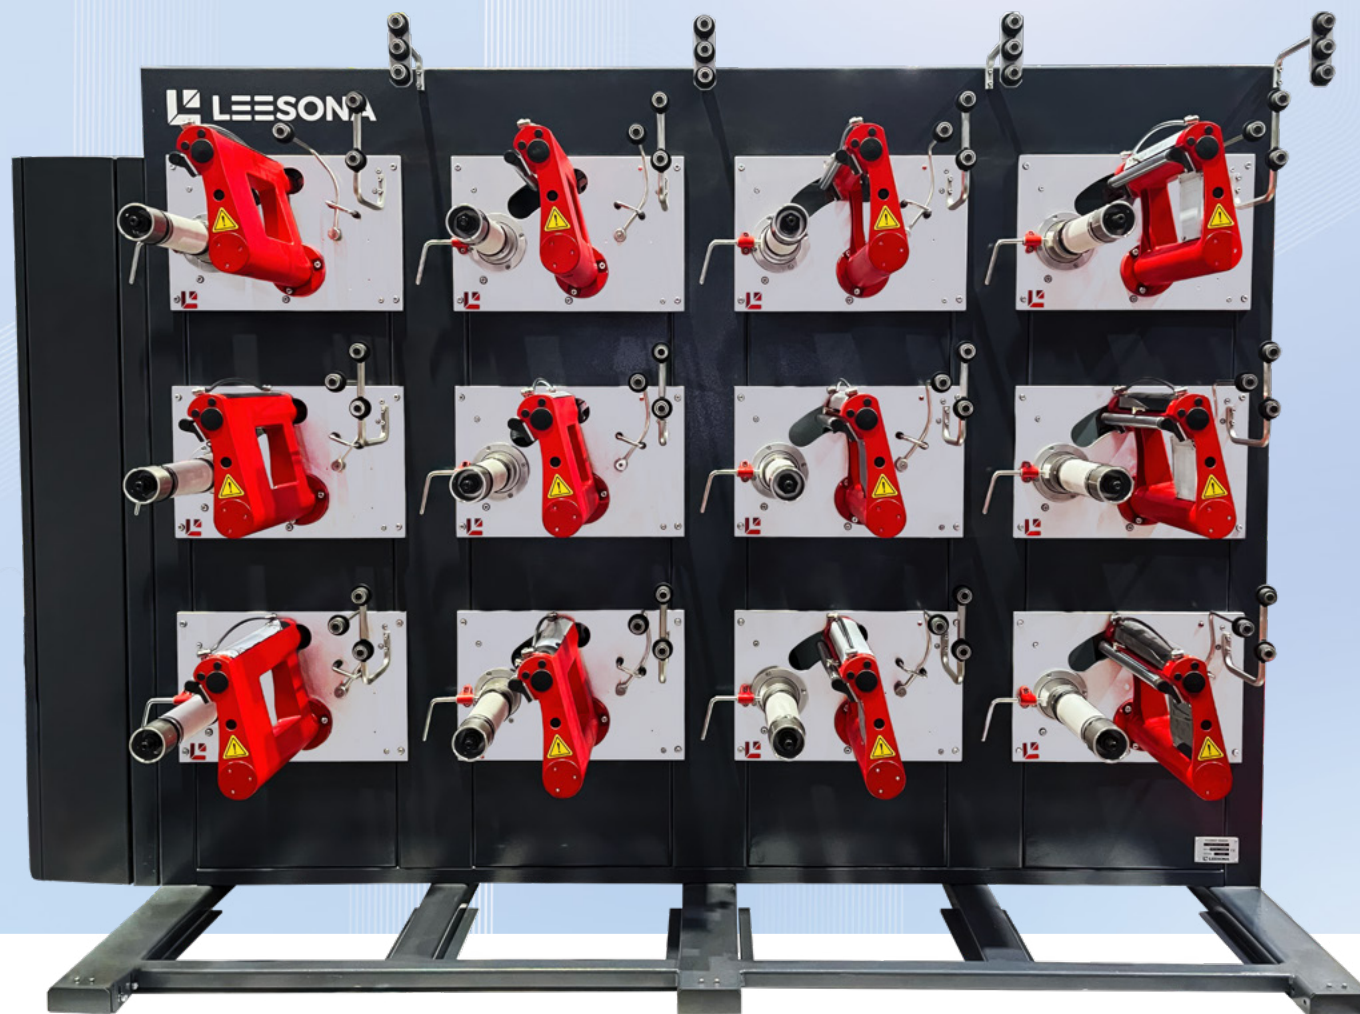

TECHNICAL SPECIFICATIONS

Model 740 MW	
Package Changeover	Manual
Winding Ratio Setting	Programmable up to 30 steps
Tape Width Range	1 end 1.2–6.0 mm 2 ends 0.9–2.0 mm
Titer (tape)	500 – 3500 dtex Fibrillated Tape up to 12000 dtex
Titer (filament)	150 – 12000 dtex
Length of Traverse	250 or 300 mm
Inner Tube Diameter	83/90/94 mm
Tube Length	280 or 330 mm
Winding Speed Mechanical (max.)	500 mpm
Max. Package Diameter	300 mm
Multiple Frame Configurations	3 Deck, 3 Across*

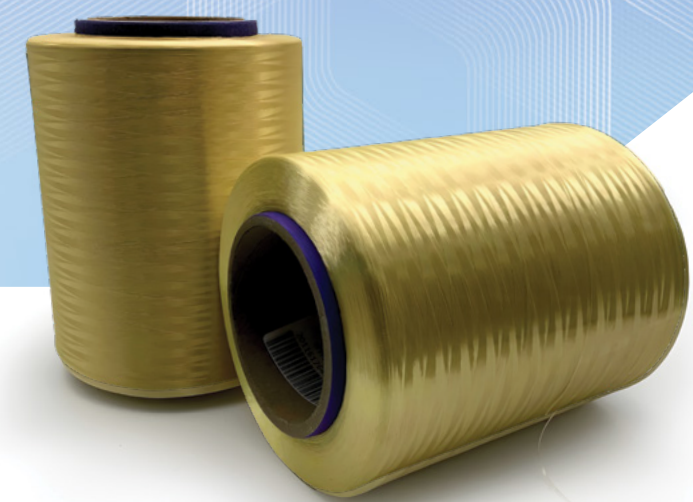

APPLICATIONS

The **740 MW** is designed for:

01

High-performance fibers & materials

02

Monofilaments & tapes

03

Multifilament yarns

04

Twisted or coated yarns

* Other configurations on request

Maximum values cannot be combined

Specifications are subject to change without prior notice, due to continuous developments. These are indicative and not binding. Photos may show optional equipment which are not part of the standard supply. For details, refer to the quotation.

130+ YEARS OF WINDING EXCELLENCE

For over 130 years, Leesona has been redefining precision winding with our smart, reliable solutions. We build high-performance, automation-ready winders designed to handle the toughest applications. Trusted in over 50 countries, we back every machine with expert craftsmanship and customer-first service.

At Leesona, you will find precision at every turn.

» CONTACT US



2050-B Willow Springs Lane
Burlington, North Carolina 27215
USA



Phone: +1 (336) 226-5511
Fax: +1 (336) 229-4381



E-mail: info@leesona.com



www.leesona.com